

## PRODUCT SELECTION

Safety padlock  $\cdot$  Safety valve lock  $\cdot$  Safety cable lock  $\cdot$  Snap lock  $\cdot$  Scaffold Warning Sign  $\cdot$  Lockout station



#### BENYI (ZHEJIANG) SAFETY PROTECTION CO., LTD.

Manager Wang

Phone: 15999997999 Address: No. 28, Binhai South Road, Economic Development Zone, Yueqing City, Zhejian ĝ Province, China. Unit 2/4.

The models, specifications, and prices published in this selection manual are subject to change due to product updates and will not be notified separately. This manual is for reference only, and everything is subject to the actual product. The final interpretation rights belong to Ben Yi (Zhejiang) Safety Protection Co., Ltd.

BENYI (ZHEJIANG) SAFETY PROTECTION CO., LTD.



## COMPANY PROFILE About benyi

We constantly pursue and focus on building intelligent security!

## Company Profile

Benyi (Zhejiang) Safety Ptotection Co., Ltd. is a high-tech enterprise with IoTtechnology as its core, f ocusing on IoTservices in the field of intelligent security. It integrates product research and development , manufacturing, design, sales, and service.

Benyi(Zhejiang)Securitymainlyengagesintechnologydevelopment,securityequipment manufacturin g, hardware product manufacturing and research and development, sales of smart home consumer dev ices, loTtechnology services and application services, and sales of information security equipment. Beny i (Zhejiang) Safety Ptotection Co., Ltd. looks forward to your joining!

Safety padlock · Safety valve lock · Safety cable lock · Snap lock · Scaffold Warning Sign · Lockout station

BENYI (ZHEJIANG) SAFETY PROTECTION CO., LTD.

BEEYi






## **PRODUCT CATALOG**



Lockout and Tagout Concept 01



Engineering safety padlocks 05-14



Key Management System 02-04



Safety buckle



Electrical Lockout

22-31 Va







15-21



Pneumatic Lockout 39-40



Scaffold Warning Sign 47-53



Safety Lockout Kit



Security Lock Bag Combination Set

69-71

60-62





Cable Lockout

41-46



Lockout Station

54-59



#### Security Lock Station 63-68 Combination Set



Safety Lock Box Combination Set 72-74

#### Lockout and Tagout Concept

Your Well-being in Our Care

#### Key Management System

#### What is lockout-tagout (Lockout/Tagout=L0T0)

• When equipment or tools are being repaired, maintained, or cleaned, the power sources related to the equipment are cut off, ensuring that the equipment or tools cannot be started, and all energy sources (electric power, hydraulic sources, air sources, etc.) are turned off.

Lockout	Locking a device that has been powered off or disconnected from energy sources to prevent others from turning on the power or energy (such as opening a valve) is a safety measure.
Warning Sign	Hang the corresponding warning or caution sign (such as "Do not close, someone is working") on a power or energy disconnection device that has been powered off or disconnected, to warn others not to turn on the power or energy - a safety measure.
Disengage the device	A device or group of devices capable of disconnecting from the connected power supply circuit.
LOTO	It is to ensure that the power to the equipment is absolutely cut off, keeping the equipment in a safe state. This can pr event accidental injuries to workers or other personnel working inside or next to the equipment due to the equipment being inadvertently turned on.

#### Why should locks and signs be used :

<sup>o</sup> Lockout-tagout is implemented to prevent workers from encountering accidental startups, abn

ormal startups, or the release of power sources during maintenance or servicing equipment, e

nsuring the personal safety of the workers.

Which places need to be locked :

- Daily maintenance, repair, adjustment, cleaning, inspection, and commissioning on equipment. Operations involving live work, entering confined spaces, hot work, disassembly, etc., at facilities such as towers, tanks, kettles (and various types of containers), heat exchangers, pumps, etc.
- High-voltage operations (including those performed near high-voltage lines).
- o Operations that require the temporary shutdown of safety systems.
- Operations during non-process maintenance and commissioning.




#### Ben Yi security locks fully comply with regulations, and the requirements for safety locks and locking devices are as follows:

Requirement	Environmental adaptation	Solid	Standardization	Recognizable	Safety purposes
Describe Describe denvironmen		Unless deliberately applied with great force, it cannot be removed.	Make distinct distinctions through differences in color, shape, or size.	Personnel auth orized to use t he device	Unusable energy for purposes othe r than control
Is it up to standard	✓	✓	✓	✓	$\checkmark$


#### The use function and method of the key's bitting





One key can only open one padlock;

Advantage: Your lock cannot be opened by keys of other locks.

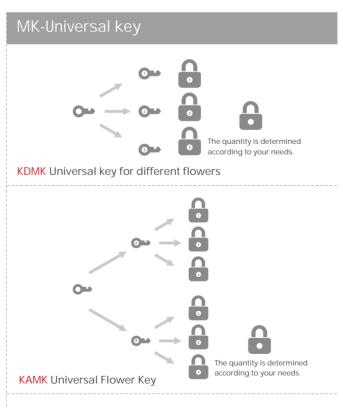


A single key can open all padlocks in several groups; Advantages: Groups can be opened with a master key.



Your Well-being in Our Care

GMK

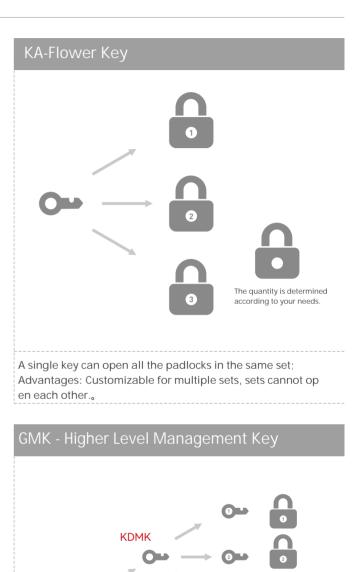

A single key can open all padlocks of groups KD, KA, or MK.

KAMK

6

6



Key Management System

## Key Management System

#### The color function, usage, and method of keys



<sup>o</sup> For example, the master key is fitted with a black key cover, while the sub-keys are not, making it easy to distinguish which one is the master key in real situations. (As shown in the image below.)




• Departments are assigned different colors, for example, red keys with red padlocks are allocated to the Electrical Maintenance Depart ment, yellow keys with yellow padlocks are allocated to the Fitter Department, and blue keys with blue padlocks are allocated to the Pr oduction Department. This way, by seeing the color, it is clear which department is conducting maintenance or which department's key s they are, making management more convenient.



#### Key archive management

Our company can encode and archive each key and padlock, so that in the event of a key or padlock being lost, just by seeing a part of the code, we can match the padlock or key. This prevent s chaos in the entire key management system.



#### Key Management System Order System Example

BY-G38-KD, 100 BY-G38-KA. 200

For example: BY-G38-KDMK, 2 sets, 300 keys per set, customizable number of master keys; For example: BY-G38-KAMK, 3 sets, 400 keys per set, customizable number of master keys, please specify if the keys are inter-changeable between sets or within sets.

Except for jacket locks and dry layer lock series, any other series can choose any management key system. If a more complex grou ping method for the management key system is required, please refer to this page or call for consultation.



#### How to select the number of key sets

Number of zinc lock cores								
Key system Letter description Management		Management level	Number of groups (groups)	Number of items in the group (pieces)	Serial number	Note		
Ordinary key	KD	None	None	1-99999	_	_		
	МК	Secondary management	6	860	_	Backup		
Universal Management Key			5	710	_	Backup		
			30	580	_	Regular inventory		
Higher level man	GMK	Three-level management	6	80	GMK3A series	—		
agement key			15	24	GMK3B series	_		

Note: If the management key system requires a more complex grouping method, please call for consultation.

Number of copper lock cores							
Key system	Letter description	Management level	Number of groups (groups)	Number of items in the group (pieces)	Serial number	Note	
Ordinary key	KD	None	None	1-99999	_	—	
	МК	Secondary management	1	36000	00series	Backup	
Universal Management Key			6	5000	10series	Backup	
5 5			30	1000	20series	Regular inventory	
Higher level	GMK	Three-level	4	6000	GMK3 series		
management key		management	23	1000	GMK4 series	_	

Note: If the management key system requires a more complex grouping method, please call for consultation.





## Safety Padlock Series

DANGER

LOCKED OUT

DO NOT REMOVE

DANGER

LOCKED OUT

DO NOT REMOVE


DANGER

LOCKED OUT

DO NOT REMOVE

## BY-G Safety Padlock Series

#### Customizable options

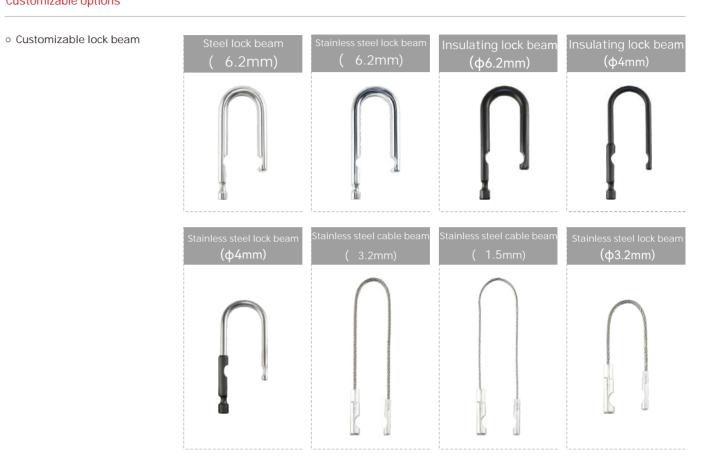

• Custom Branding Service

DANGER	PROPERTY OF
LOCKED OUT	
DO NOT REMOVE	

PELIGRO	PROPIEDAD DE:
NO QUTAR ESTE CANDAOO NOOPERAR ELEQUPO	

Other languages, customizable design





#### **BY-V Safety Padlock Series**

## Aluminum safety padlock



#### Product features

- The lock body is made of machined aluminum alloy, with an anodized surface that is bright and colorful, and the metal lo ck bar is corrosion-resistant;
- Customizable customer logos with stamped LOGO;
- UV-resistant and corrosion-proof;
- Self-resetting padlock: the lock bar automatically pops out w hen unlocked, and the lock core automatically locks when clo sed;
- Key retention feature: ensures that the padlock will not be lef t on-site in the open state;
- Laser engraving on both sides and the front of the lock body to retain permanent identification or codes;
- The lock body is available in a variety of colors.




	Lo	Lock beam(The first digit)			kbody		
Product model	Material	Inner height (mm	Diameter (mm)	Color (The second number)		Lock core	
BY-V25		25		1: Red	6: Silver		
BY-V38	Steel Stainless Steel	38	6.2	2: Gold 3: Blue	7: Orange 8: Purple	Zinc Alloy Lock Core	
BY-V76		Stainless Steel 76	0.2	4: Green	9: Brown	Self-Ejecting Retains Key	
BY-V90		90	3.2	5: Black	10: Light Gray		


Note: The lock beam is made of steel by default. If stainless steel lock beams are required, please specify.

#### Product dimensions

BY-V25















Product dimensions









#### Product appearance A variety of colors are available for the lock body

10 Light blue

11 Gray


#### **BY-G Safety Padlock Series**

### **BY-G Safety Padlock Series**



#### Product features

- The lock body is made of engineering plastic reinforced nylon PA, featuring an integrated housing design for enhanced durability, resistance to temperature differences (-30 ~+120 ), and impact resistance. The metal lock bar is treated with chrome plating;
- Self-developed lock core with a push-pull dustproof device, protecting the lock core from dust. Suitable for environments with heavy dust exposure
- Includes "Danger" and "Owner" writable labels (made of glow-in-thedark PVC material), with options for custom Chinese or other multilingual labels;
- UV resistant and corrosion-proof, free of silicone; Self-resetting padlock: The lock bar automatically pops out when
- o unlocked, and the lock core automatically locks when closed; o Key retention: Ensures that the padlock will not be left on-site in the open position;
- O Laser engraving on both sides and the front of the lock body for permanent identification or coding; A variety of colors are available for the lock body.



20



BY-G25-2

福山

#### Model code

BY -		G-N			0				1
Corporate code	Self-elastic type	Padlock series	Lock core material	Lock beam specifications		ions	Lock	shell colo	
	/Key retention characterisitc	G Steel/Stainless steel	Empty Zinc lock core	Code	Material	Inner height (mm)	Diameter (mm)	1	Red
	Inelastic type/	N Nylon	T Copper lock core	38	Steel/Stainless steel	38	6.2	2	Yellow
	Empty Key retention property	GL Stainless steel cable		38	Nylon	38	6.2	3	blue
	- Self-elastic type/			25	Steel/Stainless steel	25	6.2	4	Green
	Z Keyless entry			25	Nylon	25	6.2	5	Black
	··			76	Steel/Stainless steel	76	6.2	6	White
				76	Nylon	76	6.2	7	Orange
				90	Stainless steel cable	Rope length150	3.2/1.5	8	Purple
				Note: 1	The default material for the ste	el beam lock bean	n is steel. If	9	Brown

Note: The default material for the steel beam lock beam is steel. If stainless steel material is required for the lock beam, please specify

#### Product selection

	Lock beam(The first digit)			Lock body		Lock core		
Product model	Material	Inner height (mm)	Diameter (mm)	Padlock type	Color (The second number)	Lock core	Self-elasticity	
BY-G38	Steel/Stainless steel	38	6.2		1: Red			
BY-N38	Nylon	38	6.2		2: Yellow 3: Dark blue 4: Green			Default non- elastic type
BY-G76	Steel/Stainless steel	76	6.2	4 ] ] ] ]		llack lock core province in the province province in the province province in the province province province in the province prov	/Key retention	
BY-N76	Nylon	76	6.2	Default EB Optional ABCDE	6: White		property	
BY-G90	Stainless steel cable	Rope length150	3.2/1.5		7: Orange 8: Purple 9: Brown 10: Light blue 11: Gray		Optional self-	
BY-G25	Steel/Stainless steel	25	6.2				elastic type /No key	
BY-N25	Nylon	25	6.2	• 1 1 1 1			retention	

Example: Zinc core padlock: BY-G38; Copper core padlock: BY-G38T.




#### Product dimensions

LOCKED

DO NOT REMOVE

40







ty of colors are av	ailable for the lo	ck body	
BY-G25-3	BY-G25-4	BY-G25-5	BY-G25-6
BY-G25-9	BY-G25-10	BY-G25-11	BY-G25
			Lock beam: Steel/Stainless steel
BY-N25-3	BY-N25-4	BY-N25-5	BY-N25-6
BY-N25-9	BY-N25-10	BY-N25-11	BY-N25
			Lock beam: Nylon
BY-G38-3	BY-G38-4	BY-G38-5	BY-G38-6
BY-G38-9	BY-G38-10	BY-G38-11	BY-G38
			Lock beam: Steel/Stainless steel
BY-N38-3	BY-N38-4	BY-N38-5	BY-N38-6
BY-N38-9	BY-N38-10	BY-N38-11	BY-N38
	-	-	

Product appearance A variety of colors are available for the lock body





#### **BY-G Safety Padlock Series**


**BY-G Safety Padlock Series** 



Product dimensions



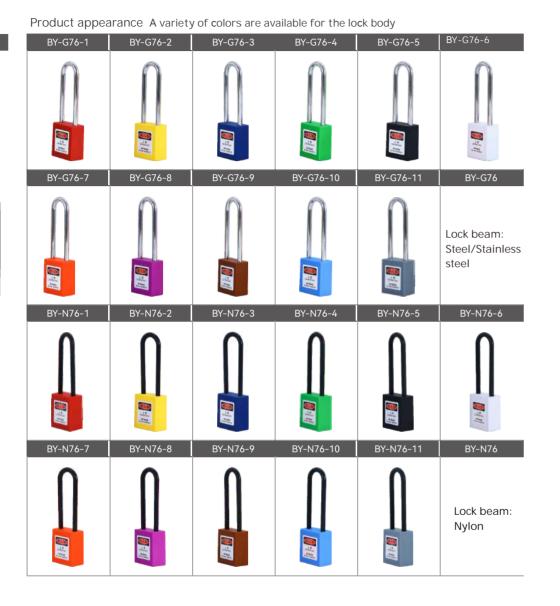







Product selection

	Lock beam (The first digit)			Lock body		
Product model	Material	Internal height (mm)	Diameter (mm)	Color (The second number)	Lock core	
BY-G29T	Nylon/	lylon/		1: Red 2: Yellow 3: Blue 4: Green 5: Black 6: Silver 7: Orange	Copper lock core/Self-	
BY-N29T	Stainless steel 29	4	8: Purple 9: Brown 10: Light Gray	Ejecting/Key retention property		

### BY-GL90 Rope safety lock



#### Product selection

	Lock beam(The first digit)			Lock body		
Product model	Material	Internal height (mm)	Diameter (mm)	Color (The second number)	Lock core	
BY-G90	Stainless	90	3.2	1: Red 2: Yellow 3: Blue 4: Green	Copper lock core/Zinc Alloy Lo ck /CoreSelf-Ejecting/Key	
BY-G90S	steel	70	1.5	5: Black 6: Silver 7: Orange         ck /CoreSelf-Ejecting/Ke           8: Purple 9: Brown 10: Light Gray         retention property		





#### Product features

- The lock shell is made of modified nylon PA, featuring an integ rated housing design for enhanced durability, resistance to te mperature differences, impact, and UV rays. The steel lock sha o ckle is chrome-plated for corrosion resistance;
- the key retention feature ensures that the padlock will not be I eft in the open position on-site;
- ° The lock body is available in various colors, with labels default ing to English & Chinese, and can be customized with multiple languages;
- $\circ$  any part of the lock body can be etched with a permanent cod e or identifier;
- A variety of colors are available for the lock body.

#### Product features

- The lock shell is made of modified nylon PA, featuring an in tegrated housing design for enhanced durability, resistance to temperature differences, impact, and UV rays.
- The lock shackle is made of 304 stainless steel, which is stro ng and corrosion-resistant.
- o The key-retaining feature ensures that the padlock will not be left open at the site.
- $\circ$  The lock body is available in various colors, with labels defa ulting to English & Chinese, and can be customized with mu Itiple languages.
- Any part of the lock body can be etched with a permanent c ode or identification.
- o A variety of colors are available for the lock body.

#### **BY-G Safety Padlock Series**



#### 产品选型

	Product model	Lock beam (The first digit)			Lock body
		Material	Internal height (mm)	Diameter (mm)	Color (The second r
	BY-GF25	Steel/ Stainless Steel	25		
	BY-GF38		38	6.2	1: Red 2: Yellow 3: Blu 5: Black 6: Silver 7: C
	BY-GF76		76		8: Purple 9: Brown 10

#### BY-NF25/38/76 Dustproof safety padlock



#### Product features

- The lock shell is made of modified nylon PA and features an integr ated housing design for enhanced durability, resistance to temper ature differences, impact, and UV rays. The steel lock shackle is ch rome-plated for corrosion resistance;
- o it is also UV resistant and corrosion resistant.
- Self-resetting padlock: The lock shackle automatically pops out w hen unlocked, and the lock core automatically locks when closed.
- Key retention: Ensures that the padlock will not be left in the open position at the site.
- Laser engraving on both sides and the front of the lock body is av ailable for permanent identification or coding.
- Dust-proof device to protect the lock hole from dust. Suitable for e nvironments with a lot of dust.
- A variety of colors are available for the lock body.

		Lock body	
al height nm)	Diameter (mm)	Color (The second number)	Lock core
25	6.2	1. Ded 2. Valley, 2. Dive 4. Crean	Copper lock core/Zinc
38		1: Red 2: Yellow 3: Blue 4: Green 5: Black 6: Silver 7: Orange 8: Purple 9: Brown 10: Light Gra	Alloy Lock /CoreSelf- Ejecting/Key retention
76		6. Pulple 9. Brown 10. Light Gra	property

#### Produc features

- The lock shell is made of modified nylon PA and features an integr ated housing design for enhanced durability, resistance to temper ature differences, impact, and UV rays. The steel lock shackle is ch rome-plated for corrosion resistance.
- UV resistant and corrosion resistant;
- Self-ejecting padlock: The lock shackle automatically pops out wh
- en unlocked, and the lock core automatically locks when closed; Key retention: Ensures that the padlock will not be left in the open position on-site;
- Laser engraving on both sides and the front of the lock body for p ermanent identification or coding;
- Dust-proof device to protect the lock hole from dust. Suitable for e nvironments with a lot of dust;
- A variety of colors are available for the lock body.

#### 产品选型

	Lock beam (The first digit)		Lock body		
Product model	Material	Internal height (mm)	Diameter (mm)	Color (The second number)	Lock core
BY-NF25		25			Copper lock core/Zinc
BY-NF38	Nylon	38	6.2	1: Red 2: Yellow 3: Blue 4: Green 5: Black 6: Silver 7: Orange 8: Purple 9: Brown 10: Light Gra	Alloy Lock /CoreSelf- Ejecting/Key retention
BY-NF76		76			property





# Safety hasp series

ċ

DANGER

This energy

source has

Only the individu Signed the revers

may remove this loc

0

MADE IN CHINA


Remarks:


been LOCKED (JT.

1

DANGER

#### BY-D Safety hasp

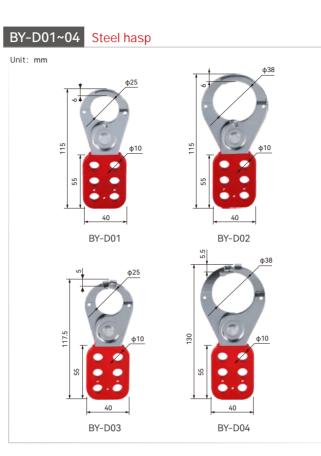

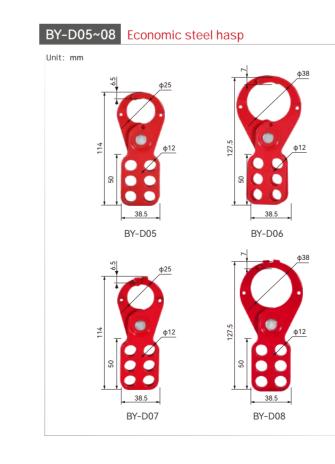



#### Product features

- <sup>o</sup> The handle is made of nylon PA by injection molding, and t he surface of the lock hook is treated with zinc plating, whic h can prevent rust and scratch;
- Lock hole diameter: 9.8mm;
- Hook diameter: 1"(25mm), 1.5"(38mm);
- The color of the handle can be customized;
- Six-hole design, allowing six people to lock at the same tim
   e, achieving the purpose of multi-person management of th
   e same energy source.

#### Product selection

Product model	Product specifications
BY-D01	A hook with a diameter of 1" (25mm) can accommodate 6 padlocks.
BY-D02	A hook with a diameter of 1.5" (38mm) can accommodate 6 padlocks.
BY-D03	A hook with a diameter of 1" (25mm) can accommodate 6 padlocks.
BY-D04	A hook with a diameter of 1.5" (38mm) can accommodate 6 padlocks.


#### Product features

- Made of iron, with a durable and eye-catching anti-rust coa ting on the surface;
- Lock hole diameter: 12mm;
- Hook diameter: 1"(25mm), 1.5"(38mm);
- Six-hole design, allowing 6 people to lock at the same time, achieving the purpose of multiple people managing the sa me energy source.


Product model	Product specifications
BY-D05	A hook with a diameter of 1" (25mm) can accommodate 6 padlocks.
BY-D06	A hook with a diameter of 1.5" (38mm) can accommodate 6 padlocks.
BY-D07	A hook with a diameter of 1" (25mm) can accommodate 6 padlocks.
BY-D08	A hook with a diameter of 1.5" (38mm) can accommodate 6 padlocks.

#### **BY-D** Safety hasp


#### BY-D09/10 Aluminum Lockout hasp



#### BY-D11~13 Nylon Lockout hasp



#### BY-D14/15 Steel Lockout hasp



#### **Product Features**

- The handle is made of PA nylon by moldin g, and the lock hook is made of chrome-pl ated aluminum;
- lock hole diameter: 9mm;
- hook diameter: 1"(25mm), 1.5"(38mm);
- Handle color can be customized;
- Six-hole design, allowing 6 people to lock simultaneously, achieving the purpose of multiple people managing the same energy source.

#### Product selection

Product model	Product specifications
	A hook with a diameter of 1" (25mm)
BY-D09	can accommodate 6 padlocks.
BY-D10	A hook with a diameter of 1.5" (38mm)
DI-DI0	can accommodate 6 padlocks.

#### **Product Features**

- Made of durable nylon PA, it does not easily break;
   Suitable for electrical isolation locking, high corrosion resi
   stance or explosion-proof requirements;
- Three or six hole design, allowing 3/6 people to lock at the same time, open by pushing and pulling up and down , open from the side.

#### Product selection

Model	Product specifications
BY-D11	Size:43mm×173mm
ווע-זם	can accommodate up to 6 padlocks
DV D40	Size: 40mm×115mm
BY-D12	can accommodate up to 3 padlocks
DV D40	Size: 43mm×193mm
BY-D13	can accommodate up to 6 padlocks

#### **Product Features**

- The handle is made of nylon PA by injection molding, and t he lock hook surface is galvanized to prevent rust and scrat ches;
- Lock hole diameter: 9mm;
- Hook diameter: 1"(25mm), 1.5"(38mm);
- The color of the handle can be customized;
- Four-hole design, allowing four people to lock at the same t ime, achieving the purpose of multi-person management of the same energy source.


#### Product selection

Product model	Product specifications	
BY-D14	A hook with a diameter of 1" (25mm) can accommodate 4 padlocks.	
BY-D15	A hook with a diameter of 1.5" (38mm) can accommodate 4 padlocks.	





#### BY-D18 Double-end Aluminum Lockout Hasp



#### BY-D19 Double-end Steel Lockout Hasp

Unit: mm





#### Product Features

- The lock body is made of engineering plastic ABS, the lock shackle is made of PA nylon;
- When locking a single source, multiple padlocks can be used for locking;
- Sliding locking design, providing lock shackle diameters of 3mm and 6mm;
- Suitable for electrical isolation locking, places with high require ments for corrosion resistance or explosion protection;
- Four-hole design, allowing four people to lock simultaneously, a chieving the purpose of multi-person management of the same energy source.

#### Product selection

Product model	Product specifications
BY-D16	The hook with a shaft diameter of 3mm can accommodate up to 4 padlocks.
BY-D17	The hook with a shaft diameter of 6mm can accommodate up to 4 padlocks.

#### **Product Features**

- Made of high-resistance fireproof aluminum alloy;
- Accepts padlocks with a maximum shackle diameter of 7mm;
- The two ends are locking shackles of different specifications, which are suitable for different occasions;
- An eight-hole design allows for 8 people to lock simultaneously, achieving the goal of multiple people managing the same energ y source.

#### Product selection

Product model	Product specifications
BY-D18	Up to 8 padlocks can be accommodated.

#### **Product Features**

- Made of iron with a durable and eye-catching anti-rust coating;
- Accepts padlocks with a maximum shackle diameter of 11mm;
- The double-end type is equipped With two sizes, suitable for different Occasions;
- Six-hole design allows for six people to lock simultaneously, achieving the goal of multiple people managing the same ener gy source.

Product model	Product specifications
BY-D19	Can accommodate up to 6 padlocks.

#### **BY-D** Safety hasp


#### BY-D20 Butterfly anti-pry hasp



#### BY-D21 Steel Lockout Hasp



#### BY-D23/24 Butterfly anti-pry hasp



#### Product Features

- The lock beam is made of steel with a surface chrome-plate
   d finish, and the handle is made of ABS engineering plastic;
   the lock hole diameter is 8mm;
- The 4-millimeter steel latch is suitable for smaller locking points;
- It can be locked by two people at the same time.

#### Product selection

Product model	Product specifications
BY-D20	Dimensions: 58mm×80mm, can accommodate up to 2 padlocks.

#### **Product Features**

- Made of steel and aluminum materials, with high-temperature spray plastic anti-rust tre atment on the surface;
- not easy to be pried, sturdy and durable;
- the beam shaft diameter is 5mm, can acco mmodate up to 6 padlocks.

#### Product selection

Product model	Product specifications
BY-D21	Can accommodate up to 6 padlocks.

#### **Product Features**

- Made of hard steel plate, the lock body surface has undergone high-temperature plastic spraying treat ment;
- multiple locking methods;
- Easy to achieve multi-person joint management;
- Suitable for industries such as chemical, machinery manufacturing, and power energy.

#### Product selection

Product model	Product specifications	
BY-D23	The shaft diameter is 4mm, it can accommodate up to 7 padlocks at most.	
BY-D24	The shaft diameter is 6mm, it can accommodate up to 8 padlocks at most.	



#### BY-D26 Aluminum Lockout Hasp

Unit: mm

**BY-D** Safety hasp



#### BY-D27 Aluminum Lockout Hasp

Unit: mm





#### **Product Features**

- Made of super-strong aluminum alloy, the material is durable and resistant.
- Integrating traditional fasteners with hang tags;
- The combination of labels and buckles enhances the applicability of the product, the temperature-resistant design of the hang tags makes them suitable for a variety of environments;
- The front and back sides of the tag can be written with pens, the tag color can be customized.

#### Product selection

Product model	Product specifications
BY-D24	Can accommodate up to 6 padlocks.

#### **Product Features**

- Made of super-strong aluminum alloy, the material is durable and resistant.
- Integrating traditional fasteners with hang tags;
- The combination of labels and buckles enhances the applicability of the product, the temperature-resistant design of the hang tags makes them suitable for a variety of environments;
- The front and back sides of the tag can be written with pens, the tag color can be customized.

#### Product selection

Product model	Product specifications
BY-D26	Can accommodate up to 8padlocks

#### Product Features


- Made of super-strong aluminum alloy, the material is durable and resistant.
- Integrating traditional fasteners with hang tags;
- The combination of labels and buckles enhances the applicability of the product, the temperature-resistant design of the hang tags makes them suitable for a variety of environments;
- The front and back sides of the tag can be written with pens, the tag color can be customized.

型号	Product specifications	
BY-D27	Can accommodate up to 9 padlocks	

## BEEYi <sub>奔一</sub>安昉

#### **BY-D** Safety hasp

#### BY-D28 Steel hasp





BY-D31

#### Product Features

- The lock body is made of steel plate;
- It comes with a distinctive label (customizable) , polygonal design, suitable for the size of pad locks:
- red label (customizable color);
- It features a 7-hole design, allowing 7 people to lock it simultaneously.

#### Product selection

Product model	Product specifications	
BY-D28	Can accommodate up to 7 padlocks.	

#### **Product Features**

- ° Made of super-strong aluminum oxide, with surface anodized treatment;
- lock hole diameter is 7mm or 8mm;
- Suitable for multiple people locking management.

#### Product selection


Product model	Product specifications	
BY-D29	Can accommodate up to 12 padlocks.	
BY-D30	Can accommodate up to 24 padlocks.	

#### Product Features

- <sup>o</sup> Made of super-strong aluminum oxide, with surface anodized treatment;
- lock hole diameter is 7mm or 8mm;
- Suitable for multiple people locking management.

#### Product selection

Product model	Product specifications	
BY-D31	Can accommodate up to 12 padlocks.	

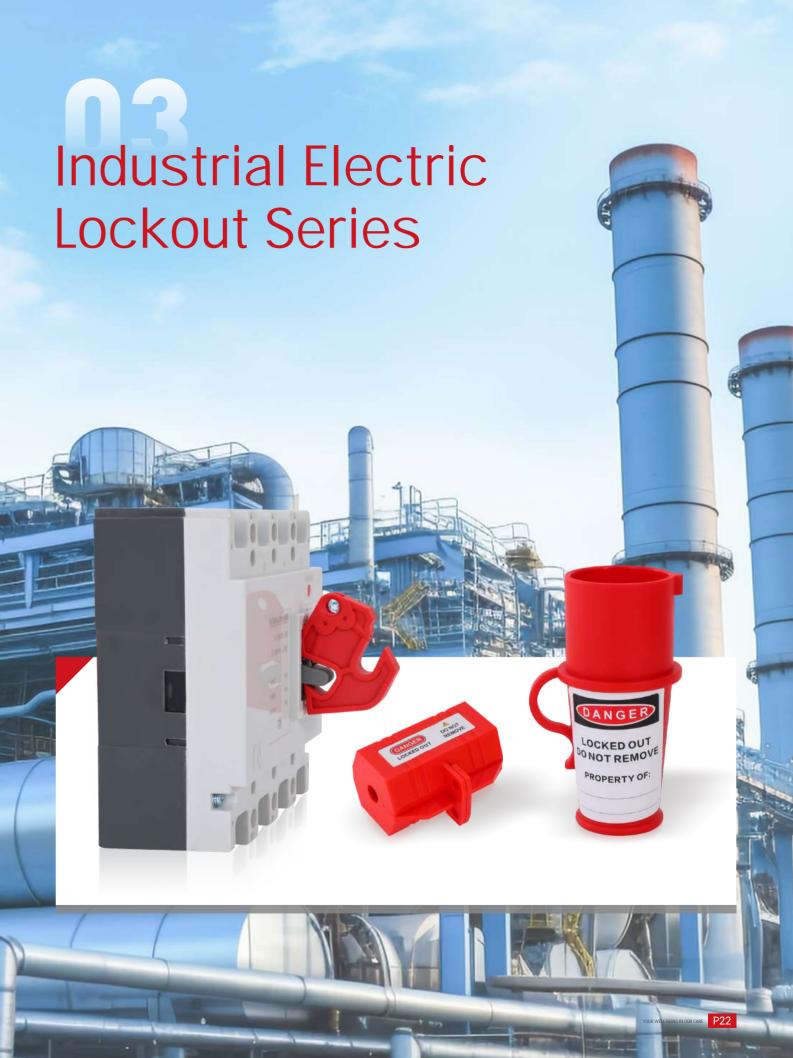


#### P21 YOUR WELL-BEING IN OUR CARE

BY-D32 Aluminum hasp

Unit: mm


#### **BY-K Series Electrical Lockout**



#### BY-K06~08 Simple Circuit Breaker Lockout



#### BY-K09/10 Miniature Circuit Breaker Lockout



#### **Product Features**

- Made of engineering plastic reinforced nylon PA;
- Compatible with European and Asian equipment, used for loc king small circuit breakers;
- Recommended to use with the padlocks too industrial safety;
- Easy to install, no tools required;
- Maximum lock diameter of 7.3mm can b
- It is available for Single pole and multi
- locks.

#### Product selection

Product model	Product specifications
BY-K01	Pins outward, suitable for miniature circuit breakers with a pin spacing 10mm.
BY-K02	Pins inward, suitable for miniature circuit breakers with a pin spacing 10mm
BY-K03	Pins outward, suitable for miniature circuit breakers with a pin spacing 20mm.
BY-K04	Lever-type, universal, suitable for most small and miniature circuit breakers.
BY-K05	Pins outwards, suitable for Schneider miniature circuit breakers.
Product East	

#### Product Features



- Product Features
- Made of sturdy reinforced nylon and cop per screws; • Equipped with locking screws, It can be
- locked easily without tools.
- Miniature circuit breakers for handle thick ness <9mm.

#### Product selection

Product model	Product specifications	
BY-K09	Suitable for handle thickness 5mm medium and small size plastic case circuit breakers	
BY-K09-1	Suitable for handle thickness 5mm medium and small size plastic case circuit breakers	
BY-K10	Suitable for various types of small and medium-sized circuit breakers	
BY-K22	Applicable for large circuit breakers	





#### BY-K17 Miniature Circuit Breaker Lockout





#### Product Features

- The base is made of PA66+20%GF, the lock body is made of PA+ABS; • Suitable for various medium-sized built-in trip molded case circuit
- breakers; • Tighten with special fastening screw to the switch handle, then fasten the cover to the special screws to prevent loosening
- The new blade design, with less effort but more tighter connection ; The removable clamping plate (included), can be used for Circuit Breakerof different sizes.
- Can be locked with a safety padlock with a shackle diameter 7mm;
- The base can clamp the bottom of the lock body easily; • The slidable long clamp plate ensures the locking of the circuit
- breaker

#### Product selection

Product model	Product specifications	
BY-K11	Lockable handle width	16mm circuit breaker
BY-K12	Lockable handle width	41mm circuit breaker
BY-K13	Lockable handle width	70mm circuit breaker

#### Product Features

- Made of engineering plastic reinforced ylon PA;
- Two different sizes at both ends can lo various types of circuit breakers;
- locked by screwdriver;
- Lock hole diameter is 6.5mm. Product selection

Product model	Product specifications	
BY-K15	Lockable handle width	10mm circuit breaker
	Lockable handle width	14mm circuit breaker

#### **Product Features**

- Made of ABS engineering plastic;
- Lock hole diameter is 7.5mm;
- Locks out most small circuit breakers.



Product model	Product specifications	
BY-K17-1	Locking pin pitch 13mm miniature circuit breaker.	
BY-K17	Suitable for most hand-held cutouts of 11mm or smaller miniature circuit breakers	

#### **BY-K Series Electrical Lockout**

## BY-K18 Circuit Breaker Lockout Unit: mm BY-K18-1 BY-K18

#### BY-K19 Multifunctional Circuit Breaker Lockout



#### Product Features The lock body is made of die-cast aluminur alloy, nylon, and steel, The surface treated with metal spray painting; • It comes with locking screws, easy and tool-free locking ; Product selection BY-K18 Lockable handle width 12mm circuit breaker Lockable handle width 16mm circuit breaker BY-K18-1

#### **Product Features**

- Made of ABS engineering plastic;
- Lock hole diameter is 7.5mm;
- Locks out most small circuit breakers

#### Product selection

Product model	Product specifications
BY-K19	Suitable for medium-sized circuit
	breakers (handle width 20mm)

#### BY-K20 Circuit Breaker Lockout





#### Product Features

- Made of engineering plastic reinforced nylon PA;
- Equipped with locking screws, can be easily lock ed without tools;
- o Suitable for various small circuit breakers (handl e width 7mm a 15mm).

#### Product selection

	and the second sec
Product model	Product specifications
BY-K20	Lock most single and multipole old-style
DI KZU	circuit breakers.

-

#### **Product Features**

- The lock body is made of reinforced nylon PA, resistant to temperatures from -20°C to 120°C;
- o it comes with locking screws for easy installation;
- o the lock hole diameter is 9mm.

#### at a ala ati Pro

oduct selection	NELS N
Product model	Product specifications
BY-K21	The maximum clamping size is 10mm.

#### **BY-K Series Electrical Lockout**









P25 YOUR WELL-BEING IN OUR CARE



#### Product Features

- Made of ABS engineering plastic;
- Tool-free installation, equipped wit
- onomic structure sturdy screws;
- o The 4-hole positions can be adjusted lock.

#### Product selection

ith erg	A State		1.01
ed to		17	
		ala I	
tenocif	ications		

Product model	Product specifications
BY-K23	Applicable to button typemotor protection switch,Maximum clamping size is 44mm.
BY-K23-1	Applicable to button typemotor protection switch,Maximum clamping size is60mm.

#### **Product Features**

- ° Made of cold-rolled steel plate, with surface electrophoresis treatment:
- Sliding left and right, two positions of adjusta
- Suitable for multi-person locking management use;
- Lock hole diameter is 8mm.

#### Product selection

Product model	Product specifications
BY-K24	EZD400-630A series of molded case circuit breakers Suitable for Schneider Electric NSX-N and

#### Product Features

- Made of ABS engineering plastic;
- Can be locked easily without tools;
- Lock hole diameter is 6.8mm ;
- To lock Schneider-specific circuit break accident;

#### Product selection

Product model	Product specifications
BY-K25	Applicable to Schneider IC65 or IC65N series singlepole or multi-pole miniature circuit breaker

#### **Product Features**


- Made of PA nylon;
- can be locked easily without tools;
- lock hole diameter is 8mm ;

#### Product selection


BY-K26


Suitable for small circuit breakers

#### **BY-K Series Electrical Lockout**










#### Product Features





#### **Product Features**

- Made of modified engineering plastic nylon PA;
- Simple and convenient to use, just snap into the correct position and lock;
- Dual-control design, suitable for switches of different sizes;
  Can be locked with two safety padlocks with a shackle
- diameter 7mm;

#### Product selection

Product model	Product specifications
BY-K29	Applicable to a very small number of circuit breakers with holes on both sides.

#### Product Features

- o Made of ABS engineering plastic ;
  o The adhesive back of the track can be fixed on the distributor
- permanently;
- (Just clean the panel and stick it on, no need to drill holes);
- Can be locked with two safety padlocks with a shackle diameter 7mm ;
- The red stop bar indicates that the switch is in the off position.
   The green barrier indicates that the switch is in the on position.

6773

#### Product selection


	Product model	Product specifications
Î	BY-30	The length of the rod is 195mm,
D1-30	suitable for most plastic case circuit breakers.	



BY-Q01 BY-Q02 BY-Q03

#### BY-Q05/05L Emergency Stop Button Guard

**BY-Q Series Electrical Lockout** 

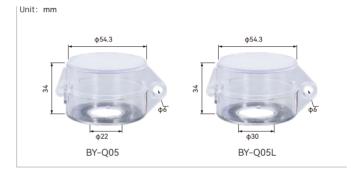





P27 YOUR WELL-BEING IN OUR CARE



#### **Product Features**

- It is made of ABS engineering plastics and can withstand temperaturefrom -20 to+90
  The double-open hexagonal lock design , available for
- various industrial plugs;
  It can realize 2-4 safety padlocks with the diameter of l beam 7mm.
- Product selection

Product model	Product specifications
BY-Q01	locks the plug with wirediameter 12.5mm and plugdiameter 45mm
BY-Q02	locks the plug with wirediameter 13mm and plugdiameter 59mm
BY-Q03	locks the plug with wirediameter 18mm and plugdiameter 58mm

#### **Product Features**

- The lock body is made of glass fiber reinforced polycarbonate, resistant to temperature differences and not prone to aging;
- visual management, the bottom can be fixed with 3M adhesive.

#### Product selection

Product model	Product specifications
BY-Q05/05L	Suitable for buttons with a neck diameter 22mm(30mm) and height 34mm.

#### Product Features

- The lock body is made of glass fiber reinforced polycarbonate, resistant to temperature differences and not prone to aging;
- $\circ$  visual management, the bottom can be fixed with 3M adhesive.

#### Product selection

Product model	Product specifications				
BY-Q06/06L	Suitable for buttons with a neck diameter 22mm and height 27mm.				

#### Product Features

- The lock body is made of glass fiber reinforced polycarbonate, resistant to temperature differences and not prone to aging;
- $\circ$  visual management, the bottom can be fixed with 3M adhesive.

Product model	Product specifications			
BY-Q07	Suitable for buttons with neck diameter 23mm (29mm or 47mm),and height 45mm.			

STA STA

#### **BY-Q Series Electrical Lockout**


#### **BY-Q Series Electrical Lockout**



### BY-Q09 Power handle lockout



#### BY-Q10 Industrial plug lockout



#### BY-Q11 Emergency Stop Button Guard



#### Product Features

Made of engineering plastic ABS;
Suitable for locking various sizes of industrial waterproof plugs.

## Product selection

 Product specifications

 Suitable for 6-125A industrial waterproof plug

#### Product Features

BY-Q08

- Made of ABS material ;
- Suitable for handle-type switches ;
- It can be fixed to the electrical panel using the built-in strong adhesive at the bottom, while also leaving mounting hole po sitions for optional screw installation.

#### Product selection

Product model	Product specifications			
BY-Q10	8mm Handle width 16mm			

#### Product Features

- The lock body is made of engineering plastic ABS, resistant to temperatures ranging from 20°C to 120°C ;
- Compact and lightweight, capable of locking various sizes of industrial waterproof plugs.

#### Product selection

Product model	Product specifications
BY-Q10	Suitable for 6-125A industrial waterproof plug

#### Product Features

- Made of high-strength glass resin PC ;
- Visual management, protective buttons, preventing accidenta I touches during work production;
- The bottom can be fixed with 3M adhesive.

#### Product selection

Product model	Internal dimensions	Installation aperture	
BY-Q11	Diameter:54mm Height:37mm	22mm	
BY-Q11-1	Diameter:54mm Height:55mm	30mm	




#### BY-Q14 Industrial waterproof plug lockout





#### BY-Q15 Rotary switch guard





Your Well-being in Our Care

#### Product Features

- Made of polypropylene (PP) material;
- Used to lock industrial plugs to prevent
- misuse and accidental contact;Four safety padlocks can be used to locks imultaneously.

#### Product selection



Product model	Product specifications			
BY-Q12	Applicable plug range: Length diameter 69mm	120mm,		
BY-Q13	Applicable plug range: Length Diameter 114mm	261mm,		

#### **Product Features**

- ° Made of engineering plastic PP;
- Cooperate with the hasp to lock the ind ustrial waterproof plug;
- multiple padlocks can be locked at the same time;



#### Product selection


Product model	Product specifications
BY-Q14-1	Lock body diameter 40mm,suitable for small industrial plug
BY-Q14-2	Lock body diameter 52mm,suitable for small industrial plug
BY-Q14-3	Lock body diameter 55mm,suitable for small industrial plug
BY-Q14-4	Lock body diameter 62mm,suitable for small industrial plug
BY-Q14-5	Lock body diameter 72mm,suitable for small industrial plug

#### Product Features

- The panel is made of glass fiber reinforced polycarbonate, and the base is made of nylon PA ;
- Visual management, can be fixed with 3M adhesive or screws;
- Suitable for rotary switches with a length and width of 50-75mm, and a height of 50-65mm.

Product model	Product specifications	
BY-Q15	Suitable for rotary switches with length and width height 50mm.	50mm,
BY-Q15-1	Suitable for rotary switches with length and width height 50mm.	60mm,
BY-Q15-2	Suitable for rotary switches with length and width height 60mm.	60mm,
BY-Q15-3	height 60mm. Suitable for rotary switches with length and width height 60mm.	70mm,
BY-Q15-4	Suitable for rotary switches with length and width height 65mm.	70mm,

#### **BY-Q Series Electrical Lockout**

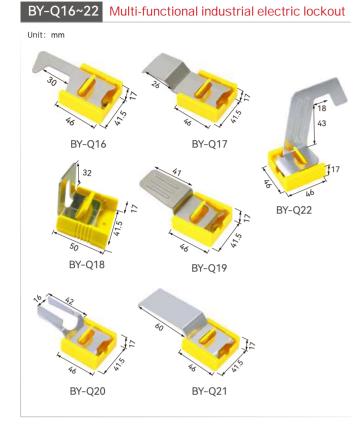



#### BY-Q24 ENTRY STOPPAGE BAG



#### our Well-being in Our Car

#### Product Features

• The lock body is made of alloy engineering plastic and A3 st eel plate (painted);

BEEYi

- Can locking for various non-standard electrical appliances or distribution cabinets;
- Fixed by double-sided 3M adhesive or screws;
- Locks can be designed in various shapes as per customer requirements;
- Base size: width 54mm × length 52mm, metal steel plate thi ckness 2mm.

#### Product selection

Product model	Product specifications			
BY-Q16	Suitable for knob switches or toggle switches with a length 30mm.			
BY-Q17	Suitable for button switches with a diameter of 26mm locking.			
BY-Q18	Suitable for knife switch, handle switch locking			
BY-Q22	Suitable for cabinet doors, drawer cabinets, electrical handle locking.			
BY-Q19	Suitable for cabinet doors, drawer cabinets, electrical handle locking.			
BY-Q20	Suitable for knob switches, toggle switches locking			
BY-Q21	Suitable for button switches, distribution cabinet lock holes, cabinet doors, etc. with a length 60mm.			

#### Product Features

- Made of soft and durable fabric;
- There is enough space to implement locking for various driving control buttons, as well as various oversized plugs or components;
- Insert the PVC liner to prevent others from accessing the butt ons on the lift controller;
- Surface printed warning signs;

#### Product selection

Product model	Product specifications
BY-Q23	Size: 450mm(W)x245mm(H)
BY-Q23-1	Size: 660mm(W)x245mm(H)

#### Product Features

- Made of wear-resistant polyester fabric;
- With a 5-meter cable lock, it can lock various entry holes;
- o Surface printed warning signs;
- Customizable warning signs.

#### Product selection

Product model	Product specifications	
BY-Q24	Size: 485mm(W)x420mm(H)	
	Cables need to be purchased separately	

# Safety valve lock series



P31 YOUR WELL-BEING IN OUR CARE

#### **BY-F Series Valve Lockout**

#### BY-F01~05

Standard gate valve lockout






BY-F01~05

BY-F01T~05T

#### BY-F08 Adjustable ball valve lockout



#### BY-F09 Adjustable flange ball valve lockout



#### Product Features

- Made of engineering plastic ABS;
- Dedicated to lock gate valves with handwheel diameters ranging from 25mm to 330mm;
- Capable locking a safety padlock with a shackle diameter of 9.8mm;
- Appearance: Red, other colors require customization
- ; provides English warning labels;

#### Product selection

Product model	Produc	t specifications	А	В	С
BY-F01/01T	Suitable for	25-64 handwheels	80	30	20
BY-F02/02T	Suitable for	64-127 handwheels	140	39	45
BY-F03/03T	Suitable for	127-165 handwheels	184	44	63
BY-F04/04T	Suitable for	165-254 handwheels	280	67	90
BY-F05/05T	Suitable for	254-330 handwheels	364	66	105

#### Product Features

- Made of hardened steel, with a surface treated by high-temper ature plastic spraying, it is not prone to rust;
- Dedicated to locking the ball valve in the closed position during right-angle turns;
- Suitable for DN8-DN200 ball valve to

#### Product selection

Product model	Product specifications
BY-F08S	Suitable for DN8-DN50 ball valve lock
BY-F08M	Suitable for DN50-DN200 ball valve lock
BY-F08L	Suitable for DN50-DN200 ball valve lock

#### Product Features


- Made of engineering plastic ABS, temperature resistant fro m -20°C to +90°C;
- Can accommodate 1 padlock to lock, with a maximum shac kle diameter of 8mm;
- Default is red, other colors can be customized.

#### Product selection





**BY-F Series Valve Lockout** 



#### BY-F16 Adjustable flange ball valve lockout





#### Product Features

- TThe lock body is made of engineering plastic reinforced nylon PA, stainless steel strips with teeth, , stainless steel round bar;
- The new type of open jaw clamp can be mounted on a closed loop, used on wide handles;
- Also applicable for locking large levers, T-shaped handles, and other difficult-to-fasten mechanical equipment;
- Cable accessories can be equipped with 1/8" (3.2mm) PVC stainless steel metal cable;
- Suitable for gate valves, ball valves, butterfly valves, and other types of valves.

Product model	Product specifications	
BY-F10S	Small valve lock, with a maximum opening size of 15mm, used in conjunction with a small retaining arm.	
BY-F10M	Standard valve lock, jaw maximum height 28mm, suitable for use with a large arm for right-angle turns.	
BY-F10L	Wide-type valve lock, maximum jaw height 45mm, used with a large arm.	
BY-F11S	Small valve lock, silver mouth with a large diameter of 15mm, used in conjunction with two small retaining arms.	
BY-F11M	Standard valve lock with a maximum jaw height of 28mm , designed to be used with two large retaining arms — suitable for use on three-way, four-way, five-way valves or valves in the "open", "closed" or "throttled" positions.	
BY-F11L	Wide-type valve lock, maximum jaw height 45mm, compatible with two large retaining arms.	
BY-F12S	Small valve lock, maximum jaw height 15mm, suitable for use with ropes.	
BY-F12M	Standard valve lock, maximum jaw height 28mm, compatible with ropes — suitable for gate valves.	
BY-F12L	Wide-type valve lock, maximum jaw height 45mm, compatible with ropes.	
BY-F13S	The jaw can lock at a maximum height of 15mm.	
BY-F13M	The jaw can lock at a maximum height of 28mm.	
BY-F13L	The jaw can lock at a maximum height of 45mm.	
BY-F14S	Small valve lock, maximum jaw height 15mm, used with a small arm and cable.	
BY-F14M	Standard valve lock, maximum jaw height 28mm, compatible with a large arm and cable.	
BY-F14L	Wide-type valve lock, maximum jaw height 45mm, compatible with a large arm and cable usage.	

#### Product selection

#### Product Features

- Made of engineering plastic ABS;
- Can be used with padlocks, maximum shackle diameter 9. 8mm;
- Universal gate valve lock, adjustable locking range, suitabl e for valve handles from 25-165mm;
- Customizable in other colors.

Product model	Product specifications	
BY-F16	Suitable for $\varphi$ 25-165mm handwheels	

#### **BY-F Series Valve Lockout**

#### BY-F01~07Z

Standard Gate Valve Lockout




#### Product Features

- Made of engineering plastic ABS, Without any metal components;
- Adopting a design with differently sized semicircles, it can be i ntegrated into one when storing or carrying, reducing its volume by half, making it easier to store and manage;
- Dedicated to lock gate valves with handwheel diameters ranging from 25mm to 330mm;
- Can be used with two padlocks with beams diameter 8mm;
- Appearance: Red, other colors are customizable, English labels are provided.


#### Product selection

Product model	Produc	t specifications	A	В	С
BY-F01Z	Suitable for	25-64 handwheels	83	28	19
BY-F02Z	Suitable for	64-127 handwheels	136	38	39
BY-F03Z	Suitable for	127-165 handwheels	170	50	64
BY-F04Z	Suitable for	165-254 handwheels	260	59	85
BY-F05Z	Suitable for	254-330 handwheels	360	76	99
BY-F06Z	Suitable for	330-457 handwheel	460	78	95
BY-F07Z	Suitable for	457-600 handwheel	655	63	135

#### BY-F17 Adjustable butterfly valve lockout



#### BY-F23 Sanitary butterfly valve lockout




#### Product Features

- Made of engineering plastic ABS; Locking with a safety padlock with a shackle diameter
- 7mm ;
- o Color: Red, other colors need to be ordered.

#### Product selection


Product model	Product specifications
BY-F17	Suitable for disc valves with handle width of
	8mm-45mm



BY-F23 Adjustable range between 37mm to 190mm





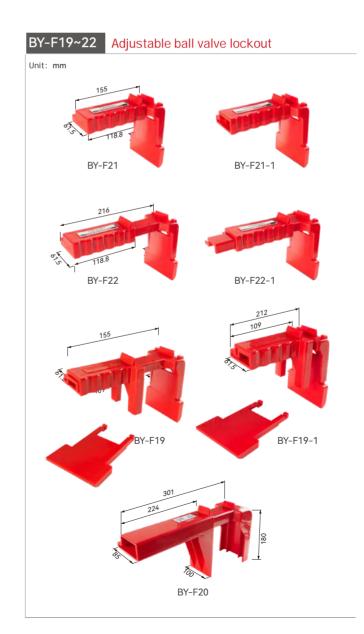

P35 YOUR WELL-BEING IN OUR CARE



#### **Product Features**

- Made of engineering plastic ABS;
- The ball valve handle can be fixed in the open or closed positi on to prevent rotation, with a temperature resistance of -30°C to 120°C, and is sturdy and durable;
- Supports multi-user locking managemen ° Customizable lock body color, laser engr

#### Product selection

Product model	Product specifications
BY-F18S	Suitable for DN8-DN50 ball valve lock
BY-F18M	Suitable for DN50-DN100 ball valve lock
BY-F18L	Suitable for DN50-DN200 ball valve lock

#### **Product Features**

- Made of engineering plastic ABS;
- The ball valve handle can be fixed in the open or closed posit ion to prevent rotation; temperature resistant from -20°C to 9 0°C, sturdy and durable.
- Suitable for DN8-DN200: pipe diameter 9.5cm-70cm;
- Supports multi-user locking management;
- Customizable labels, lock body color, laser engraving.

Product model	Product specifications
BY-F21	Suitable for DN8-DN50 ball valves
BY-F21-1	Suitable for DN8-DN50 ball valves
BY-F22	Suitable for pipes with diameters ranging from 9.5mm (3/8 inch) to 31mm (1/1/5 inch), with front and back footplates.
BY-F22-1	Suitable for DN50-DN70 ball valves
BY-F19	Suitable for DN8-DN50, DN50-DN70 ball valves
BY-F19-1	Suitable for pipes with diameters ranging from 13mm (1/2 inch) to 70mm (2/3/4 in ch), featuring front and back footplates.
BY-F20	Suitable for DN50-DN200 ball valves






#### **BY-F Series Valve Lockout**

#### **BY-F Series Valve Lockout**



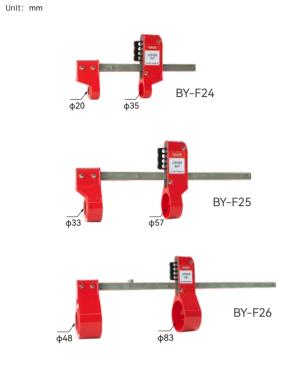

Standard Butterfly Valve Lockout

#### Product Features

•Made of aluminum alloy & engineering plastic; •Four safety padlocks can be locked at the same time, Supports multi-user locking management ; Durable opowder-coated aluminum fixtures +

hardened steelsliding bars ensure ensure indoors and outdoors us use indoors and outdoors.

#### Product selection

Product model	Product specifications
BY-F24	Suitable for blind flange width between 30mm-240mm
BY-F25	Suitable for blind flange width between 95mm-370mm.
BY-F26	Suitable for blind flange width between 190mm-530mm.



#### Product Features

- Made of PA modified enhanced nylon, durable, lightweight, resistant to chemical corrosion, and can
- effectively lock in extreme environments; Use in conjunction with the cable lock, thread the cable through the lock hole and secure it around the neck of the valve, then lock it with a safety padlock.

#### Product selection

Product mode	Product specifications	
BY-F27	The adjustable angle is from 15° to 36°.	

#### Product Features

- The lock body is made of stable and wear-resistant zinc alloy material and the surface is treated by high temperature plastic spraying;
- It is used to lock the industrial ball valve in the closed state to preventmisuse and touch by mistake;
- Maximum diameter of locking beam:7mm;
- Applicable to all ball valves with handle thickness≤10mm.

#### Product selection


Product mode	Product specifications		
BY-F28	Dimensions: 163×56x92 Applicable handle length	150	
BY-F28-1	Dimensions: 108×39x52 Applicable handle length	150	



#### BY-F33/34 Multi-purpose valve lockout

BY-F31

Unit: mm






BY-F32

BY-F34





BY-F34-1



Standard ball valve lockout

BY-F27

Unit: mm

BY-F28

Unit: mm





#### Product Features

- Composed of engineering plastic ABS and stainless steel loc king straps;
- Suitable for manual plug valves with a diameter of 1" to 8";
- applicable to this kind of valves that difficult to lock;
- Durable, anti-tamper, compact size, easy to use.

#### Points for attention

#### Select a valve lock of appropriate size

Measure the size from A to B, that is, the diameter of the valv e stem, and then select the appropriate plug valve lock accor ding to the diameter of the valve stem.

#### The re-opening of the valve is extremely simple

If the valve stem plane above the wrench and clamp can still fully engage, the plug valve lock base and fixture can remain on the valve for future use; at this point, simply remove the I ock box plug valve cap to open the valve. DANGER

#### Product selection

LOCKED OUT	
Product model Product specifications	
BY-F29 Handwheel diameter 22mm	
BY-F30 Handwheel diameter23-34mm	
BY-F31 Handwheel diameter44-52mm	1
BY-F32 Handwheel diameter55-62mm 7	7

#### **Product Features**

- Composed of PA modified reinforced nylon, toothed carbon steel sheets, and stainless steel screws;
- Equipped with locking screws, It can be locked easily without tools:
- Maximum diameter of the lock bar: 7mm;
- Height 192mm × Width 94mm × Depth 32mm (excluding the length of the screw rod);
- Applicable the range of valve height : 31mm-100mm ;

Product model	Product specifications
BY-F33/F33-1	Applicable for locking disc valves
BY-F34/F34-1	Applicable for locking T-type valves



## Pneumatic/bottle lock series

DANGER

POWER CORD

LOCKED OUT

This lockout


device may only be


removed by:


Dept:\_\_\_\_\_ Expected Completion

#### **BY-QD Series Pneumatic Lockout**











#### **Product Features**

- The lock body is made of engineering plastic ABS;
- Prevent unauthorized operation of the cylinder valve, which must match the cylinder cap diameter and thread perfectly.

#### Product selection

Product model	Product specifications
	Suitable for cylinder caps with a neck diamet
	er 35mm, inner diameter 89mm.

#### Product Features

- Made of engineering plastic ABS, temperature resistant from -20°C to 120°C;
- Equipped with English warning labels, easy to install;

#### Product selection

Product model	Product specifications
BY-QD02/02-1	Suitable for tanks, propane tanks, etc. locking

#### Product Features

- The lock body is made of 304 stainless steel;
- It prevents the air source connector from being re connected to the high-pressure source, allowing two people to lock it together.

#### Product selection

Product model	Product specifications
BY-QD03	Suitable for air source connectors with a di ameter of 7mm-20mm.

#### Product Features

- The lock body is made of engineering pl astic nylon PA.
- 3 locked dimensions, The center hole can be used to store air hoses.

Product model	Product specifications
	Suitable for thread joints with diameters
	of 12mm/13mm/16mm



#### **BY-L Series Cable lockout**



## BY-L03 Handheld cable lockout Unit: mm

#### BY-L04 Wheel-type cable lockout

Unit: mm





#### Product features

- The lock body is made of engineering plastic ABS and has strong corrosion resistance, other colors can be customized ;
- ° The cable is made of muti-strand steel wire, and the outer lay er of the cable is made of transparent PVC.
- Cable length can be customized.
- 4 padlocks can be locked at the same time.
- It has high visibility. The surface of the lock body has an erasa ble tag.which can be rewritten repeatedly, and the length can be customized.

#### Product selection

Product model	Product specifications
BY-L01	Cable diameter:4mm,length:2m
BY-L02	Cable diameter:6mm,length:2m

#### Product features

- The lock body is made of engineering nylon PA with high corrosionresistance.
- The cable is made of multi-strand steel wire, and the outer layer of the cable is made ofred PVC.
- Cable length can be customized.
- It supports a padlock for locking.
- o It can be used with Buckle extension lock to achieve the purpose of multi-user locking management.

#### Product selection

Product model	Product specifications
BY-L03	Cable diameter:4mm,length:2m

#### Product Features

- The lock body is made of engineering plastic PA;
- Using stainless steel cables, the outer layer of the cables is made of UV-resistant PVC:
- Customizable in both color and length;
- Multiple padlocks with a shackle diameter of 7mm can be used to secure locking;
- It can lock various isolation points effectively, including gate valves, T-handle valves, and other mechanical equipment t hat are difficult to secure, etc.


Product model	Product specifications
BY-L04	Cable diameter:4mm,length:2m

#### **BY-L Series Cable lockout**





#### BY-L06 Simple cable lockout



#### BY-L06B Stainless Steel Handheld Cable Lockout



## BY-L07/08 Self-locking cable lockout



#### Product features

- The lock body is made of engineering plastic ABS, and the ou ter layer of the cable is made of red PVC;
- Six safety padlocks can be locked at the same time;
- The color and length can be customized:
- o It has high visibility, the surface of the lock body has a writab le label, which can be erased repeatedly, and the length can be customized.

#### Product selection

Product model	Product specifications
BY-L05	Cable diameter: 3.8mm, length: 2m

#### Product features

- The lock body is made of nylon PA; the cable is made of stainless steel, and the outer layer of the cable is made of PVC:
- o It is compact and easy to install, with built-in labels;
- Supports locking for 5 people together;
- ° Customizable cable length, color, and label.

#### Product selection

Product model	Product specifications
BY-L06	Cable diameter: 3.3mm, length: 2m

#### Product features

- <sup>o</sup> The lock body is made of stainless steel; the cable is made of stainless steel, and the outer layer of the cable is made of PVC;
- o Adjustable cable, anti-rust and anti-spark, comes with a label;
- Supports locking for 7 people;
- Customizable cable length, color, and label.

#### Product selection

Product model	Product specifications
BY-L06B	Cable diameter: 3.3mm, length: 2m

#### Product features

- The lock body is made of engineering plastic ABS;
- It uses stainless steel cables, with the outer layer of the cabl es made of UV-resistant PVC
- Innovative self-locking function, the cable is in a self-lockin g state when not operated, ensuring the cable is not stretch ed at will:
- Can be permanently labeled (in English or other languages) to identify the operator;
  Can be locked with 5 safety padlocks with a shackle diamet
- er 7mm.

Product selection

Product model	Product specifications
BY-L07/08	Cable diameter: 3.8mm, length: 2m



#### BY-L12 Adjustable cable lockout



## BY-L13 New adjustable cable lockout Unit: mm BY-L13



P43 YOUR WELL-BEING IN OUR CARI



#### Product features

- The lock body is made of ABS;
- The outer layer of the cable is made of red PVC;
- Five safety padlocks can be locked at the same time;

#### Product selection

Product model	Product specifications
BY-L09	Cable diameter:3mm,length:2m
BY-L10	Cable diameter:3mm,length:2m

#### Product features

- The lock body is made of engineering plastic ABS;
- It uses stainless steel cables, with the outer layer of the cable s made of UV-resistant PVC:
- Innovative self-locking function, the cable is in a self-locking state when not operated, ensuring the cable is not stretched at will:
- Can be permanently written with labels (in English or other la nguages) to identify the operator;
- ° Can be locked with 5 safety padlocks with a shackle diameter 7mm.

#### Product selection

Product model	Product specifications
BY-L12	Cable diameter:1.5mm,length:0.3m

#### Product features

- The lock body is made of ABS, with a stainless steel cable inside a PVC sheath, resistant to corrosion and high temperatures;
   After pressing the button, the excess cable automatically retracts
- and coils, tightening the cable to complete the effective locking;
- It can lock various circuit breakers and small gate valves effectively;
- It features an automatic cable retraction function, easy to operate, compact and portable;
- <sup>o</sup> Eight safety padlocks can be locked at the same time, the maximum diameter of the lock beam is 8mm
- The product color and cable length can be customized.

#### Product selection

Product model	Product specifications
BY-L13	Rope diameter: 1.5mm Length: 2m


#### Product features

- The lock body is made of ABS engineering plastic, which is c orrosion-resistant;
- The cable is made by twisting multiple strands of steel wire, with the outer layer made of red PVC;
- the cable diameter is 4.3mm, and the length is 2m;
- The length of the cable can be customized;
- Supports locking with 6 padlocks, with a lock shackle diamet er less than 11mm.

Product model	Product specifications
BY-L14	Cable diameter:4.2mm,length:2m
;	

#### **BY-L Series Cable lockout**

### BY-L15 Adjustable cable lockout Unit: mm



#### BY-L16 Micro cable lockout




#### BY-L17 Handheld cable lockout





#### BY-L18 Adjustable cable lockout

Unit: mm



#### Product features

- The lock body is made of ABS+PC alloy;
- o It uses stainless steel cables, with the outer layer of the cable s made of UV-resistant PVC;
- It can be locked with 6 safety padlocks with a shackle diamet er 7mm;
- The color is red.

#### Product selection

Product model	Product specifications
BY-L15	Cable diameter:5mm,length:1.8m

#### Product features

- The lock body is made of engineering plastic nylon PA;
- The stainless steel cable is used, with the outer layer made of UV -resistant PVC
- The black part is pushed up to open the cable, pushed down to l ock the cable, and there is a LOCKOUT reminder function on the r ed part;
- After locking, the cable can only be tightened, which makes oper ation more convenient;
- Customizable labels (customizable in multiple languages);
- Equipped with 6mm and 8mm locking apertures, suitable for r lock beams of different specifications.

#### Product selection

Product model	Product specifications
BY-L16	Cable diameter: 1.5mm, length: 0.5m

#### Product features

- The lock body is made of ABS, with steel cables, and the out o er layer of the cables is made of red PVC;
- o it can accommodate the management of 4 people at the sa me time:
- <sup>o</sup> The color of the lock body and the size and length of the cab le can be customized.

#### Product selection

Product model	Product specifications
BY-L17	Cable diameter: 3.2mm, length: 2.4m
BY-L17-1	Cable diameter:5mm,length:2.4m

#### Product features

- The lock body is made of ABS engineering plastic, which is c orrosion-resistant;
- The cable is made of twisted multi-strand steel wires, with t he outer layer made of red PVC;
- The cable diameter is 4.3mm, and the length is 2 meters. Th e cable length can be customized;
- Supports locking with 6 padlocks, with lock shackle diamete r less than 11mm.

#### Product selection

Product model	Product specifications
BY-L18	Cable diameter:4.2mm,length:2m

#### **BY-L Series Cable lockout**



#### BY-L20 Lead blockade





#### Product features

- Suitable for long-term locking situations, after locking, the l ock can only be opened by cutting the cable;
- All aluminum seals have individual laser-printed numbers; • The length of the cable can be customized;
- The color can be customized, with standard colors being re d, yellow, green, and blue.

#### Product selection

Product model	Product specifications	
BY-L18	Aluminum alloy lock body, galvanized cable rope.	Cable diameter: 2.5mm Width: 256mm

#### Product features

- Suitable for the places that need to be locked for a long time , after locking, the lock can only be opened by cutting the cable:
- All aluminum seals have individual laser-printed numbers;
- The length of the cable can be customized;
- The color can be customized, with standard colors being red , yellow, green, and blue.

Product model	Product specifications	
DV I 10	Aluminum alloy lock body, galvanized cable rope.	Cable diameter: 2.5mm
DI-LI7	galvanized cable rope.	Width: 256mm



## Safety Warning Tag Series

Ref:No.

DANGER

DO NOT

**OPERATE** 

Maintenance Department

This lock/label may only

be allowed to be removed by

Dept

Dept

Expected Completion:

Expected Completion

DANGER

DO NOT

OPERATE

This lock/label may only

be allowed to be removed by

Name:

Dept:

Expected Completion

Expected Completion

#### **BY-J Series Warning Tag**

#### Safety Warning Tag

#### Product Introduction

- It can be used to control equipment comprehensively to protect personnel from injury and prevent damage to the equipment.
- Used with safety padlocks in conjunction, it serves as a reminder that the equipment has been locked and cannot be operated. It also indicates that the locking procedure can only be undone by the person who applied the lock, ensuring that the user can be identified immediately in a factory setting to protect the safety of workers;

Label customization service



• Customizable color for label text content







• The safety tag has safety warning slogans such as "Danger/Do Not Operate/Warning" and blank spaces for users to fill in items like "Name/Department/Estimated Completion Time".

• Labels can provide customization services in English or other multiple languages on both sides

	1151	0
R	DANGER	DANGER
	DO NOT	This energy source has been LOCKED OUT!
TE	OPERATE	Only the individual who signed the reverse side may remove this lock/tag.
ay only moved by	This Lock/tag may only be removed by. Name:	Remarks :
	Dept:	
	Expected Completion:	· · · · · · · · · · · · · · · · · · ·





#### BY-J Series Warning Tag



Unit: mm















LOCK BY-J07

LOCKED

OUT

BY-J10
















DANG DANGER DO NOT OPERATE LOCKED This









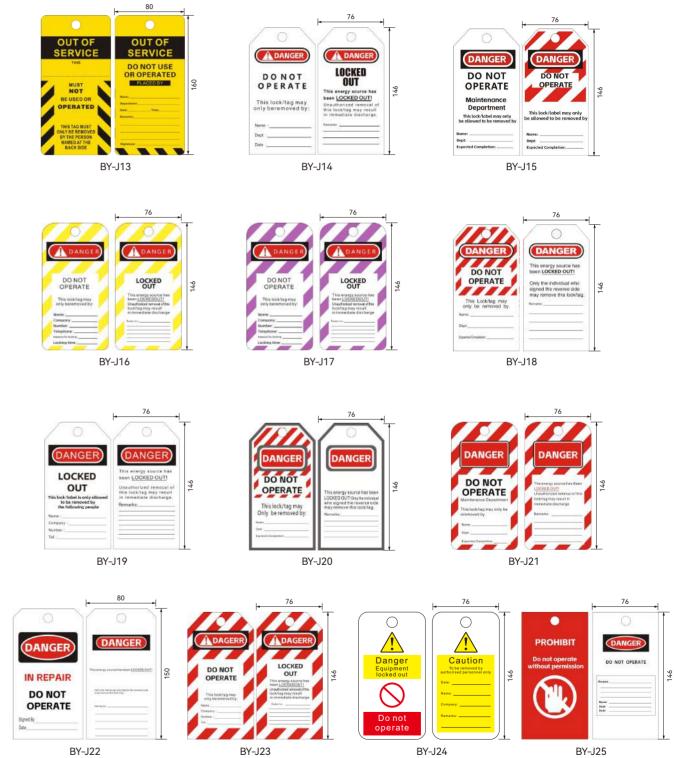



BY-J Series Warning Tag

DO NOT OPERATE







### **BY-J Series Scaffolding Tags**

#### Scaffolding Tags

#### Product Introduction

- Used to indicate the status and availability of scaffolding, available to be tied onto cables, suitable for all legal hanging points.
- The card with sign is embedded in slot, different colors indicating various warning effects:

Green card: The cardstock is embedded with the green side facing out, indicating that the scaffolding is safe and can be used normally;

Yellow card: The cardstock is embedded with the yellow side facing out, indicating that the scaffolding is faulty and under maintenance;

Red card: The cardstock is not embedded in the sign, and the warning text and patterns on the sign itself are displayed in red, indicating that the scaffolding is prohibited from use..

Label customization service

The labels can provide customization services in English or other multiple languages for both si des.



Integrated label slot

Made of high-strength ABS engineering plastic, resistant to heat, cold, and corrosion; Available in multiple colors for use by different departments.

The label reads "Do not use this device"; Customized services are available, printing specific content such as customer information, company logo, contact number, etc.; Languages: Chinese, English, multilingual including Chinese and English, etc.

formation, etc.

Labels (made of PVC material)

Customizable in other languages

Customizable in other colors

Customizable text and patterns, such as cust omer information, company logos, contact in



Normal use

(Green card)

Under maintenance (Yellow card)



#### BY-J41 Circular Scaffold Tag




#### BY-J43 Square Scaffold Tag
















#### BY-J46 Large scaffold Tag








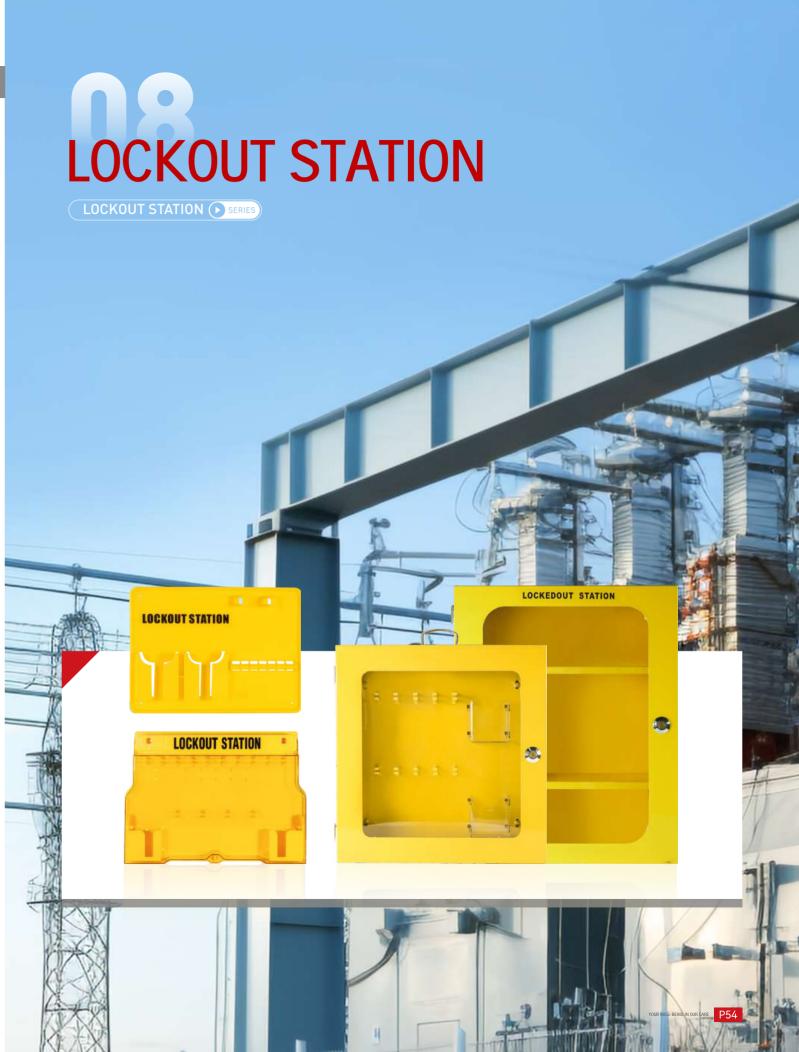


## **BY-S Series Lockout station**

## BEEYi

#### **BY-S Series Lockout station**

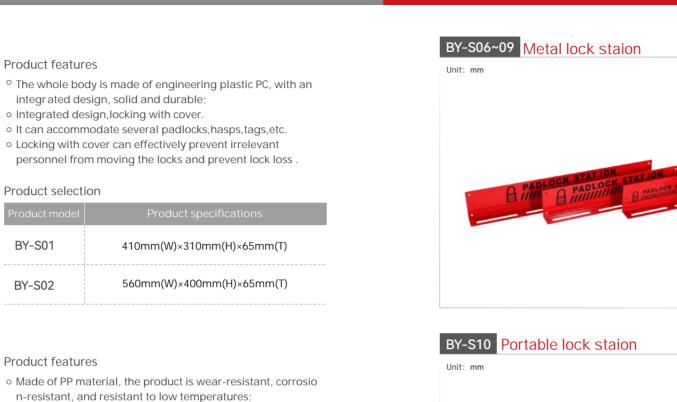






#### BY-S01/02 Integrated Lockout station



#### BY-S03/04 Open-ended Lockout station



#### BY-S05 ntegrated Lockout station



#### Product features

Product features

Product selection

BY-S01

BY-S02

Product features

d tags, zip ties, etc.

Product selection

BY-S03

BY-S04

integrated design, solid and durable;

Integrated design, locking with cover.

• The outer cover is made of plastic PC, and the base plate is made of engineering plastic ABS;

• It can be equipped with various hasp, padlocks, and can hol

385mm(W)×290mm(H)×40mm(T)

360mm(W)×350mm(H)×40mm(T)

- With a lockable lid to prevent accidental touching, it can acc ommodate 16 padlocks and other locking devices;
- Customizable base plate color, laser engraving.

#### Product selection

Product model	Product specifications
BY-S05	560mm(W)×400mm(H)×65mm(T)

Unit: mm



#### Product features

- Made of steel plate, with surface high-temperature spray plastic treatment;
- Four sizes are available for selection, can accommodate 5-2 0 padlocks, making daily lock management convenient;

#### Product selection

Product model	Product specifications
BY-S06	140mm(L)×40mm(W)×80mm(H)
BY-S07	270mm(L)×40mm(W)×80mm(H)
BY-S08	400mm(L)×40mm(W)×80mm(H)
BY-S09	530mm(L)×40mm(W)×80mm(H)

#### Product features

- Formed by injection molding of engineering plastic reinforc ed nylon;
- Equipped with warning labels, padlocks and keys can be ca rried and used simultaneously;
- Can hold 12 padlocks, other colors can be customized;

#### Product selection

Product model	Product specifications
BY-S10	185mm(W)×130mm(H)

#### Product features

- Made of steel plate treated with high-temperature surface spra ying and stainless steel handles with PA nylon edging.
- Allows multiple people to lock important components simultan eously, with a maximum of 13 padlocks that can be attached;
- Can be used as a small portable lock box, capable of holding s everal tags, buckles, small locks, etc.

Product model	Product specifications
BY-S11	229mm(W)×152mm(H)×89mm(T) Can hang 12 padlocks
BY-S11-1	229mm(W)×152mm(H)×89mm(T) Can hang 13 padlocks
BY-S12	229mm(W)×152mm(H)×89mm(T) Can hang 12 padlocks.There is a visual window on one side
BY-S12-1	229mm(宽)×152mm(高)×89mm(厚) Can hang 13 padlocks.There is a visual window on one side



#### BEEYi 奔—安防


#### **BY-S Series Lockout station**







#### BY-S14 Key box



#### Product Features

- Made of ABS and PC materials;
- Comes with a transparent visor;
- Can be locked with a safety padlock with a shackle diameter 7mm;
- Has 6 hook positions inside, allowing 8 safety padlocks for locking at the same time.

#### Product selection

Product model	Product specifications
BY-S13	100mm(W)×150mm(H)×80/118mm(T)


#### **Product Features**

- ° Made of steel plate, with surface high-temperature spray plastic treatment it is resistant to oxidation and rusting;
- Comes with Transparent acrylic door panels;
- Has 3hook positions inside.Can accommodate several padlocks.

#### Product selection

Product model	Product specifications
BY-S14	140mm(W)×140mm(H)×100mm(T)

BY-S15 Dual-use lock box



#### Product features

- Made of steel plate, with surface high-temperature spray plastic treatment equipped with a handle made of stainless steel + nylon material;
- Key storage device involved in the shutdown of large equip ment:
- Dual function wall-mounted or portable;
- Customizable colors;
- Can be used as a small portable lock box, can accommodate o several tags, buckles, small locks, etc., storage space can orderly store up to 12 hanging locks;

#### Product selection

Product model	Product specifications
BY-S15	155mm(W)×330mm(H)×82mm(T)

## **BY-S Series Lockout station**



#### BY-S18/19 lockout station



#### BY-S20 lockout station

Unit: mm



BY-S20



#### Product Features

- Made of steel plate, with surface high-temperature spray plastic treatment, it is not prone to oxidation and rust, Comes with Transparent acrylic door panels;
- Customizable non-transparent panels;
- Features 30 hook positions, capable of holding a number of padlocks, clasps, etc;

#### Product selection

Product model	Product specifications
BY-S16	560mm(W)×460mm(H)×90(T)
BY-S17	580mm(W)×680mm(H)×90(T)

#### Product features

- Made of steel plate, with surface high-temperature spray plastic treatment, it is not prone to oxidation and rust;
- Comes with Transparent acrylic door panels ; Portable and easy to carry;
- Customizable non-transparent panels;
- There are 10 hook positions, which can accommodate a number of padlocks, clasps, etc;

#### Product selection

Product model	Product specifications
BY-S18	360mm(W)×380mm(H)×90(T)
BY-S19	480mm(W)×500mm(H)×90(T)

#### Product features

- Made of steel plate, with surface high-temperature spray plastic treatment; it is not prone to oxidation and rust;
- Comes with Transparent acrylic door panels;
- There are 20 hook positions, which can accommodate a nu mber of padlocks, clasps, etc;

Product model	Product specifications
BY-S20	560mm(W)×380mm(H)×90(T)
	l L

### **BY-S Series Lockout Station**

## BEEYi

#### BY-S21/22 Double Door lockout station



#### Product features

- Made of steel plate, with surface high-temperature spray plastic treatment ; it is not prone to oxidation and rust;
- Comes with Transparent acrylic door panels;
- With two movable partitions, it can set the compartment space flexibly ment space, There are 20-30 hook positions, which can accommodate a number of padlocks, clasps, etc;
- Customizable non-transparent panels.

#### Product selection

Product model	Product specifications
BY-S21	630mm(W)×630mm(H)×90mm(T)
BY-S22	630mm(W)×640mm(H)×90mm(T)



lockout station

#### BY-S24

OUR WELL-BEING IN OUR CARE

BY-S23



lockout station



BY-S24

#### Product features

- Made of acrylic board and steel plate with high-t emperature spray coating on the surface;
- Equipped with 2 adjustable shelves;
- Customizable non-transparent panels.

#### Product selection

Product model	Product specifications
BY-S23	360mm(W)x450mm(H)x160mm(T)
BY-S23-1	480mm(Wx600mm(H)x180mm(T)
BY-S23-2	600mm(Wx800mm(H)x200mm(T)
BY-S23-3	600mm(W)x1000mm(H)x200mm(T)

#### Product features

- Made of steel plate, with surface high-temperature spray plastic treatment;
- Comes with Transparent door panels;
- Customizable non-transparent panels are available.
   There are 22 hook positions, which can accommodate a number of padlocks, clasps, etc;

#### Product selection

Product model	Product specifications
BY-S24	560mm(W)x460mm(H)x70mm(T)

# Lock luggage



LOCKOUT TAGOUT



#### **BY-B series Safety Lockout Kit**



#### BY-B02 Security lock tool handbag



#### BY-B03 Safety lock tool handbag



#### BY-B04 Safety lock tool handbag



#### Portable security lock tool pouch BY-B05

## 单位: mm LOCKOUT KIT 290

#### Product features

• The lock set bag is made of wear-resistant polyester fabric; • Customizable surface label content for customers, such as XX Company or XX Department.

#### Product selection

Product model	Product specifications
BY-B01	180mm(L) × $150$ mm(W) × $60$ mm(H)

#### Product features

• The lock set bag is made of wear-resistant polyester fabric; • Customizable surface label content for customers, such as XX Company or XX Department.

#### Product selection

Product model	Product specifications	
BY-B02	$310$ mm(L) $\times$ $230$ mm(W) $\times$ $200$ mm(H)	

#### Product features

• The lock set bag is made of wear-resistant polyester fabric; • Customizable surface label content for customers, such as XX Company or XX Department.

#### Product selection

Product model	Product specifications
BY-B03	260mm(L) × $160$ mm(W) × $85$ mm(H)

#### Product features

• The lock set bag is made of wear-resistant polyester fabric; • Customizable surface label content for customers, such as XX Company or XX Department.

#### Product selection

Product model	Product specifications
BY-B04	197mm(L) × 125mm(W) × 92mm(H)
	L

#### Product features

• The lock set bag is made of wear-resistant polyester fabric; • Customizable surface label content for customers, such as XX Company or XX Department.

#### Product selection

Product model	Product specifications	
BY-B05	290mm(L) × $332$ mm(W) × $90$ mm(H)	

### BY-B series Safety Lockout Kit



#### BY-B07 Safety lock tool handbag

# 单位: mm





#### Product features

- The lock set bag is made of wear-resistant polyester fabric;
- Customizable surface label content for customers, such as XX Company or XX Department.

#### Product selection

Product model	Product specifications	
BY-B06	220mm ( L ) $\times$ 145mm ( W ) $\times$ 90mm ( H )	

#### Product features

- The lock set bag is made of wear-resistant polyester fabric;
- Customizable surface label content for customers, such as XX Company or XX Department.

#### Product selection

Product model	Product specifications
BY-B07	$197 \text{mm}(\text{L}) \times 125 \text{mm}(\text{W}) \times 92 \text{mm}(\text{H})$
	, L

#### Product features

- Made of coated iron sheet and engineering plastic PP;
- o Customizable surface label content for customers, such as XX Company or XX Department;

Product model	Product specifications
BY-B08/09	400mm(L)×190mm(W)×180mm(H)



# Security Lock Sta Combination Set



# LOCKEDOUT STATION









#### BY-Z101 Security lock combination set

Unit: mm



#### BY-Z102 Security lock combination set

Unit: mm





#### Note: The combination station for safety locks can be freely combined

#### Product list

Quantity
1
10
2
2
20
20
1

#### Product list

Product model	Quantity
Lockout station(BY-S01)	1
Safety padlock(BY-G38/KD)	4
Safety hasp(BY-D01)	1
Safety Warning Sign((BY-J07)	10
Self-locking nylon tie	10
Marker	1

Product model	Quantity
Lockout station(BY-S03)	1
Safety padlock(BY-G38/KD)	4
Safety padlock(BY-N38/KD)	3
Safety hasp(BY-D01)	1
Safety hasp(BY-D02	1
Safety Warning Sign(BY-J07)	5
Safety Warning Sign(BY-J04 )	5
Self-locking nylon tie/Marker	10/1



Note: The combination station for safety locks can be freely combined.

#### BY-Z Series Security Lock Station Combination Set Your Well-being

#### BY-Z Series Security Lock Station Combination Set

## BY-Z103 Security lock combination set



#### Product list

Product model	Quantity
Lockout station(BY-S03)	1
Safety padlock(BY-G38/KD)	7
Safety padlock(BY-N38/KD)	7
Safety hasp(BY-D01)	2
Safety hasp(BY-D02	2
Safety Warning Sign(BY-J07)	15
Self-locking nylon tie	15
Marker	1

#### Product list

Product model	Quantity	
Lockout station(BY-S18)	1	
Safety padlock(BY-G38/KD)	5	
Safety padlock(BY-N38/KD)	5	

## BY-Z105 Security lock combination set

BY-Z104 Security lock combination set

Unit: mm

Unit: mm



#### Product list

Product model	Quantity	Product model	Quantity
Lockout station(BY-S19)	1	Self-locking nylon tie	10
Safety padlock(BY-G38/KD)	3	Marker	1
Safety padlock(BY-G76/KD)	2		r — — — — — —
Safety padlock(BY-N38/KD)	3		
Safety padlock(BY-N76/KD)	2		
Safety hasp(BY-D01)	1		
Safety hasp(BY-D02)	1	;	
Safety Warning Sign(BY-J07)	10		



## BY-Z107 Security lock combination set



#### BY-Z108 Security lock combination set

Unit: mm





## Note: The combination station for safety locks can be freely combined.

#### Product list

Product model	Quantity
Lockout station(BY-S16)	1
Safety padlock(BY-G38/KD)	10
Safety padlock(BY-G76/KD)	4
Safety padlock(BY-N38/KD)	10
Safety padlock(BY-N76/KD)	4
Safety padlock(BY-G90/KD)	3
	r
	!

#### Product list

Product model	Quantity Product model		Quantity
Lockout station(BY-S17)	1	Safety hasp(BY-D11)	4
Safety padlock(BY-G38/KD)	10	Safety Warning Sign(BY-J07)	10
Safety padlock(BY-G76/KD)	5	Safety Warning Sign(BY-J04)	10
Safety padlock(BY-N38/KD)	10	Self-locking nylon tie	20
Safety padlock(BY-N76/KD)	5	Marker	1
Safety padlock(BY-G90/KD)	2		
Safety hasp(BY-D01)	1		
Safety hasp(BY-D02)	1		

Product model	Quantity	Product model	Quantity
Lockout station(BY-S23)	1	Safety hasp(BY-D11)	1
Safety padlock(BY-G38/KD)	5	Gate valve lock (BY-F01)	1
Safety padlock(BY-G76/KD)	3	Gate valve lock ((BY-F02)	1
Safety padlock(BY-N38/KD)	5	Gate valve lock ((BY-F18S)	1
Safety padlock(BY-N76/KD)	3	Circuit breaker lock(BY-K01	1
Safety cable Lock(BY-L01)	1	Circuit breaker lock(BY-K02)	1
Safety hasp(BY-D01)	1	Circuit breaker lock(BY-K03)	1
Safety hasp(BY-D02)	1		



#### BY-Z Series Security Lock Station Combination Set

#### BY-Z Series Security Lock Station Combination Set

BY-Z109 Security lock combination set



#### BY-Z110 Security lock combination set



## BY-Z111 Security lock combination set



#### Note: The combination station for safety locks can be freely combined.

Product list			
Product model	Quantity	Product model	Quantity
Lockout station(BY-S23-1)	1	Gate valve lock(BY-F23)	1
Safety padlock(BY-G38/KD)	5	Gate valve lock(BY-F01)	1
Safety padlock(BY-G76/KD)	3	Gate valve lockBY-F02)	1
Safety padlock(BY-N38/KD)	5	Gate valve lock(BY-F18S)	1
Safety padlock(BY-N76/KD)	3	Circuit breaker lock(BY-K11)	1
Safety cable Lock((BY-L01)	1	Circuit breaker lock((BY-K12)	1
Safety cable Lock(BY-L02)	1	Circuit breaker lock((BY-K13)	1
Bottle lock (BY-DQ01)	1		

#### Product list

Product model	Quantity	Product model	Quantity
Lockout station(BY-S21	1	Safety hasp(BY-D11)	2
Safety padlock(BY-G38/KD)	10	Gate valve lock(BY-F02)	1
Safety padlock(BY-G76/KD)	2	Safety Warning Sign(BY-J07)	20
Safety padlock(BY-N38/KD)	6	Self-locking nylon tie	20
Safety padlock(BY-N76/KD)	2		
Safety cable Lock(BY-L01)	1		
Safety cable Lock(BY-L02)	1		
Safety hasp((BY-D02)	2		

#### Product list

Product model	Quantity	Product model	Quantity
Lockout station(BY-S22)	1	Gate valve lock(BY-F01)	1
Safety padlock(BY-G38/KD)	10	Gate valve lock(BY-F02)	1
Safety padlock(BY-G76/KD)	5	Circuit breaker lock(BY-K11)	2
Safety padlock(BY-N38/KD)	10	Safety cable Lock(BY-L01)	1
Safety padlock(BY-N76/KD)	3	Safety Warning Sign(BY-J07)	20
Safety padlock(BY-G90/KD)	2	Self-locking nylon tie	20
Safety hasp(BY-D01)	2	Marker	1
Safety hasp(BY-D02)	2		





#### Note: The combination station for safety locks can be freely combined.

Product model	Quantity	Product model	Quantity
Lockout station(BY-S24)	1	Self-locking nylon tie	20
Safety padlock(BY-G38/KD)	5	Marker	1
Safety padlock(BY-G76/KD)	5		
Safety padlock(BY-N38/KD)	5		
Safety padlock(BY-N76/KD)	5		
Safety padlock(BY-GL90/KD)	5		
Safety Warning Sign(BY-J07)	10		
Safety Warning Sign(BY-J04)	10		



## Securit combinat



BY-Z Series Security Lock Bag Combination Set







P69



## Note: The combination station for safety locks can be freely combined.

#### Product list

Product model	Quantity	Product model	Quantity
Lockout kit(BY-B05)	1	Circuit breaker lock(BY-K12)	3
Safety padlock(BY-G38/KD)	4	Circuit breaker lock(BY-K04)	3
Safety hasp(BY-D01)	1	Safety Warning Sign(BY-J07)	15
Safety hasp(BY-D02)	1	Self-locking nylon tie	20
Safety hasp(BY-D11)	1	Marker	1
Plug lock(BY-Q01)	1		
Plug lock(BY-Q02	1		
Circuit breaker lock(BY-K11)	3		

#### Product list

Product model	Quantity	Product model	Quantity
Lockout kit(BY-B03)	1	Self-locking nylon tie	20
Safety padlock(BY-G38/KD)	4	Marker	1
Safety hasp(BY-D01)	1		
Safety hasp(BY-D02)	1		
Circuit breaker lock(BY-K11)	3		
Power Plug lock(BY-Q02)	1		
Safety hasp(BY-D11)	1		
Safety Warning Sign(BY-J07)	20		

Product model	Quantity
Lockout kit(BY-B03)	1
Safety padlock(BY-G38/KD)	3
Safety hasp(BY-D01)	1
Safety hasp(BY-D04)	1
Safety hasp(BY-D11)	1
Safety Warning Sign(BY-J07)	10
Self-locking nylon tie	10
Marker	1

Product list

## Note: The combination station for safety locks can be freely combined.

#### BY-Z203 Security Lockset Kit



Product model	Quantity	Product model	Quantity
Lockout kit(BY-B06	1	Safety hasp(BY-D16)	1
Safety padlock(BY-G38/KD)	3	Power Plug lock(BY-Q02)	1
Circuit breaker lock(BY-K01)	1	Safety Warning Sign(BY-J07)	10
Circuit breaker lock(BY-K02)	1	Self-locking nylon tie	10
Circuit breaker lock(BY-K03)	1	Marker	1
Circuit breaker lock(BY-K11)	2		
Safety hasp(BY-D09)	1		
Safety hasp(BY-D10)	1		

## BY-Z204 Security Lockset Kit



#### Product list

Product model	Quantity	Product model	Quantity
Lockout kit(BY-B07)	1	Safety Warning Sign(BY-J07)	10
Safety padlock(BY-G38/KD)	5	Self-locking nylon tie	10
Circuit breaker lock(BY-K01)	1	Marker	1
Circuit breaker lock(BY-K02)	1		
Circuit breaker lock(BY-K03)	1		
Circuit breaker lock(BY-K11)	2		
Safety hasp(BY-D01)	1		
Safety hasp(BY-D02)	1		

## BY-Z205 Security Lockset Kit





Product model	Quantity	Product model	Quantity
Lockout kit(BY-B07)	1	Safety hasp(BY-D24S)	1
Safety padlock(BY-G38/KD)	5	Safety hasp(BY-D09)	1
Safety hasp(BY-D16)	1	Safety hasp(BY-D10)	1
Power Plug lock(BY-Q02)	1	Safety hasp(BY-D16)	1
Motor lock(BY-K23/T)	2	Rope lock(BD-L08)	1
Circuit breaker lock(BY-K11)	2	Rope lock(BD-L09)	1
Circuit breaker lock(BY-K12)	1	Safety Warning Sign(BY-J07)	15
Gate valve lock (BY-F01)	1	Self-locking nylon tie	20
Gate valve lock (BY-F02)	1	Marker	1
Gate valve lock (BY-F03)	1		
Gate valve lock (BY-F18S)	1		





BY-Z300 Security lock set box

#### Memorandum

## Note: The combination station for safety locks can be freely combined.

Unit: mm

 Product list			inou.
Product model	Quantity	Product model	Quantity
Lockout box(BY-B08)	1	Power Plug lock(BY-Q01)	1
Safety padlock(BY-G38/KD)	5	Gate valve lock(BY-F01)	1
Safety hasp(BY-D11)	2	Circuit breaker lock(BY-K11)	2
Circuit breaker lock(BY-K01)	2	Circuit breaker lock(BY-K12)	2
Circuit breaker lock(BY-K02)	2	Gate valve lock(BY-F18S)	1
Circuit breaker lock(BY-K03)	2	Rope lock(BY-L01)	1
Safety hasp(BY-D01)	2	Safety Warning Sign(BY-J07)	20
Safety hasp(BY-D02)	2	Marker	1
Circuit breaker lock(BY-K07)	3		

#### BY-Z301 Security lock set box

Unit: mm

	Product model	Quantity	Product model	Quantity
	Lockout box(BY-B09)	1	Gate valve lock(BY-F23)	1
LICKOUT KIT	Safety padlock(BY-G38/KD)	4	Rope lock(BY-L01)	1
	Safety hasp(BY-D11)	2	Safety Warning Sign(BY-J07)	20
	Circuit breaker lock(BY-K11)	1	Marker	1
	Circuit breaker lock(BY-K12)	1		
	Circuit breaker lock(BY-K13)	1		
	Safety hasp(BY-D01)	2		
	Safety hasp(BY-D02)	2		
-	Gate valve lock(BY-F18S)	1		

